

WABO[®] ELASTODEC E

Plain and laminated elastomeric bearings

DESCRIPTION

WABO ELASTODEC E bearings are manufactured making use of materials complying with all regulations in force, in simple layers of rubber or with several layers separated by thin sheet metal. In reinforced bearings, vulcanized rubber sheets are used to protect the steel from corrosion and to convey horizontal forces from rubber to sheet metal.

This steel sheet is smaller in size than bearing, in order to be encapsulated by the rubber, and their edges are finished in order to prevent cutting the rubber.

WABO ELASTODEC E bearings consist of rubber, which are possibly reinforced by sheet metal and may be rectangular (fig.1) or circular (fig. 2) in shape. In case of larger movement requirement, the WABO ELASTODEC EM (free sliding – fig. 3), ELASTODEC EL (guided longitudinal – fig. 4) and ELASTODEC ET (guided transversal) bearings are put forward, that are very similar to the previous models, with the option of the addition of a PTFE layer and of a stainless steel sliding surface.

USES

WABO ELASTODEC E elastomeric bearings are used as bearings in bridges and in other civil and industrial structures. Actually, they are capable of taking up and transferring forces from an element to another in the structure and placed vertical between sections act as to absorb seismic shock.

ADVANTAGES

- Reduced thickness
- Easy installation
- Maintenance-free
- Cost-effectiveness

PACKAGING

WABO ELASTODEC E bearings are supplied complete with identification data indelibly engraved into their surface.

TYPICAL PROPERTIES*

Rubber used for manufacturing

WABO ELASTODEC E is based on synthetic elastomers complying with UNI-CNR 10018/87 standard, featuring Shore A hardness equal to 60 ± 3 .

Polymers making up the elastomer feature particularly long and flexible molecular chains, capable of being elastically deformed when developing under the vulcanization process.

Upon request, elastomers with other properties and bearings meeting different standards, such as AASHTO, DIN, BS 5400, BS EN 1337, SETRA, NBN, etc. can be supplied. Fe 430-UNI 7070 or higher grade steel is used for WABO **WABO ELASTODEC E** bearing reinforcements, featuring the following specifications:

- Tensile strength: R, N/mm² ≥ 350
- Yield strength: P, N/mm² ≥ 230
- Elongation at break, A, % ≥ 15

Sheet thickness is not lower than 2 mm.

Stainless steel is X5 Cr Ni Mo 17/12 UNI 6903/71, with mirror-finished surface to UNI13963, 2 mm thickness. Surfaces in contact with PTFE are polished and feature roughness Ra $\leq 0,1$ mm, according to UNI 3696.

WABO[®] ELASTODEC E

PTFE is a virgin polytetrafluorethylene produced by free deposition instead of thickening, featuring the following specifications:

- Density, kg/m³ 2170±30
- Tensile strength (23°C), N/mm² ≥ 24
- Elongation at break (23°C): A, % ≥ 300
- Hardness, Shore D ≥ 55

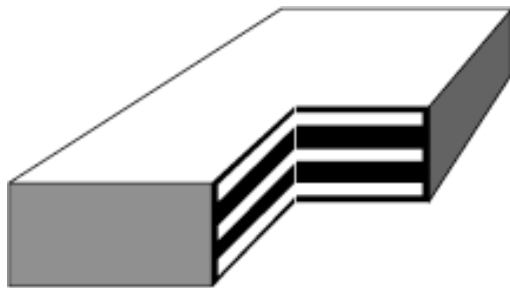


Figure 1: Rectangular laminated bearing

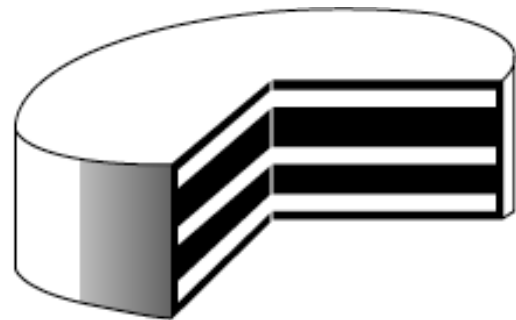


Figure 2: Circular laminated bearing

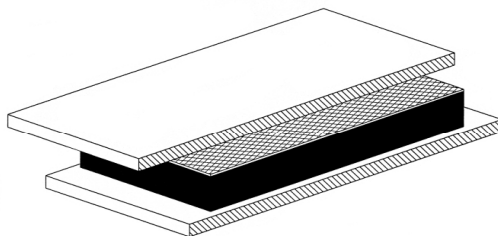


Figure 3: Cross-section of a free sliding bearing (WABO ELASTODEC EM)

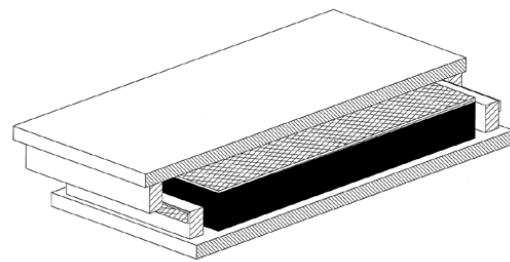


Figure 4: Cross-section of a guided longitudinal bearing (WABO ELASTODEC EL)

WABO[®] ELASTODEC E

INSTALLATION

WABO ELASTODEC E bearings must be correctly positioned for optimum operation and long service life. The surface of contact between concrete and bearing shall be smooth, free from protruding parts and clean, to afford perfect seating of bearing. This surface shall be perfectly level and at least 5 cm greater than the bearing's size. To bond bearings to structures, mortars or epoxy resins suitable for the applied rubber type must be used.

All slopes – if any – shall be eliminated by fitting adequate levelling layers onto the pre-cast beams, or by placing a resin prism between bearing and superstructure.

Bearings shall be placed with their shorter side parallel to the beam axis, in order to allow for a greater possibility of rotation.

The Master Builders Solutions representative shall be pleased to provide additional detailed information.

STORAGE

When bearings are not directly installed upon supply they shall be stored in an adequate place, raised from the ground, and in such a way as to be protected from shock, dust, humidity and direct sunlight.

HEALTH AND SAFETY

Appropriate health and safety advice can be found in the Material Safety Data Sheets.

Users are advised to wear gloves and eye protection when installing **WABO ELASTODEC E** bearings.

QUALITY AND CARE

All products originating from Master Builders Solutions Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001 and ISO 14001.

* Properties listed are based on laboratory controlled tests.

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this Master Builders Solutions publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by Master Builders Solutions either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not Master Builders Solutions, are responsible for carrying out procedures appropriate to a specific application.

Master Builders Solutions
Construction Chemicals LLC
P.O. Box 37127, Dubai, UAE
Tel: +971 4 8090800
www.master-builders-solutions.com/en-ae

Disclaimer: the TUV mark relates to certified management system and not to the product mentioned on this datasheet



A brand of
MBCC GROUP

MBS_CC-UAE/ElastE_09_10/v3/10_14/v4/03_21/v5/05_21