


UCRETE® DP10

Heavy duty polyurethane resin light profile floor finish

UCRETE® DP10 offers a uniformity of surface texture with enhanced aesthetics so providing a safe and attractive working environment.

UCRETE® DP10 is dense and impervious providing the ideal floor finish for applications in the food and beverage, pharmaceutical and chemical industries and wherever a robust long lived floor is required.

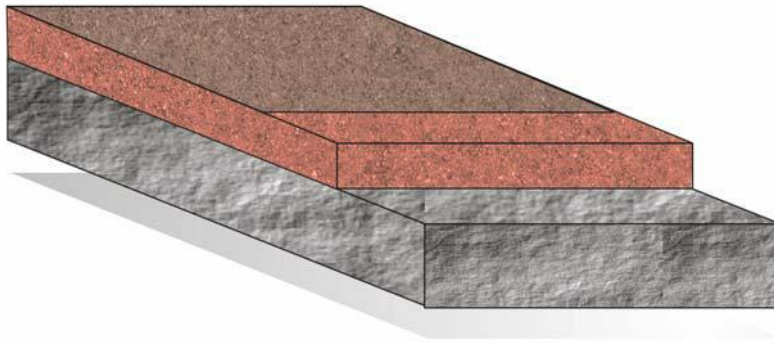

| | | | Consumption |
|---|---------------------------|---|-------------------|
| ■ | Body Coat | Basecoat B4 HD PU, 3 component, solvent free | 6.0 – 8.0 kg/m² |
| | or | Basecoat B6 HD PU, 3 component, solvent free | 10.0 – 12.0 kg/m² |
| | or | Basecoat B9 HD PU, 3 component, solvent free | 16.0 – 18.0 kg/m² |
| | Broadcast | Filler F5 | 4.0 – 5.0 kg/m² |
| ■ | Top Coat | UCRETE® Topcoat HD PU, 3 component, solvent free | 0.4 - 0.6 kg/m² |
| | Total Thickness of System | | 4.0 – 9.0 mm |

Slip resistance R11 to DIN 51130

Consumptions are indicative and may be higher, depending on substrate roughness and porosity, as well as waste produced during application

08-2006

