


# MasterSeal<sup>®</sup> 935

## Double-sided butyl tape

### DESCRIPTION

**MasterSeal 935** is double sided, long-term flexibility, butyl rubber coated tape. Butyl rubber tape has release liner for easy removal.

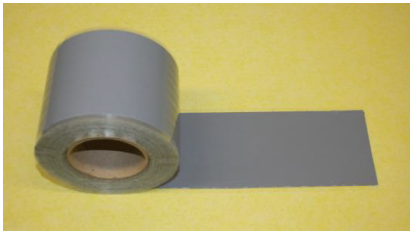

### TYPICAL APPLICATIONS

**MasterSeal 935** double sided butyl tape which is used for **MasterSeal 754** pre-applied waterproofing applications at critical details and damaged areas.

Application on edges, end points, and pile heads. For application of overlapping areas of FPO films.

### ADVANTAGES

- Provides easy application at end points of membrane
- Self-adhesive on both sides
- Combines perfectly with **MasterSeal 754** membrane

### PACKAGING AND ROLL SIZES

**MasterSeal 935** is supplied as 0.8mm thick, width of 100mm and length of 100 meters.

### COLOUR

Grey

### APPLICATION GUIDELINES

In **MasterSeal 754** pre-applied membrane applications, **MasterSeal 935** is placed to the edges, end points and damaged areas. Protection foil is removed from the accessory. **MasterSeal 754** is combined with double sided butyl surface on both sides of **MasterSeal 935**.

### COVERAGE / YIELD

Application requirements can vary according to the total consumption of the project

### STORAGE AND SHELF LIFE

**MasterSeal 935** has a shelf-life of 12 months from date of production if stored properly in unopened, undamaged, original packaging in dry conditions and at temperatures between +5°C and +30°C.

### TYPICAL PROPERTIES\*

Material composition	Coating: Self-adhesive butyl rubber, high elastic, resistant to ageing Protection : Release foil
Total width	100mm
Total thickness	0.8mm (with release liner)
Length per roll	100 meters
Material weight	1050g/m <sup>2</sup> (with release liner)
Resistance to temperature	-30°C to 60°C
Chemical properties	Resistance to wide range of chemical liquids

# MasterSeal<sup>®</sup> 935

## QUALITY AND CARE

All products originating from Master Builders Solutions Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational health & safety standards ISO 9001 and ISO 14001.

\* Properties listed are based on laboratory controlled tests.

® = Registered trademark of the MBCC Group in many countries.

MBS\_CC-UAE/SI\_935\_05\_17/v1/

### STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this Master Builders Solutions publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

### NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by Master Builders Solutions either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not Master Builders Solutions, are responsible for carrying out procedures appropriate to a specific application.

**Master Builders Solutions**  
**Construction Chemicals LLC**  
P.O. Box 37127, Dubai, UAE  
Tel: +971 4 8090800  
[www.master-builders-solutions.com/en-ae](http://www.master-builders-solutions.com/en-ae)

**Disclaimer:** the TUV mark relates to certified management system and not to the product mentioned on this datasheet



A brand of  
**MBCC GROUP**