

MasterSeal[®] 953

PVC Flange for resin injection

DESCRIPTION

MasterSeal 953 finishing element for synthetic liners made of polyvinyl chloride.

PRIMARY USE

It is composed of a pre-formed valve made of the same type of material. This can be connected to injection pipe and injection connector to enables control/repair of the compartmentalisation system.

SCOPE

It is composed of a pre-formed valve made of the same type of material (PVC) that allow direct access to the void existing between the waterproof and secondary layers enabling monitoring and repairs of the waterproof system during its life.

TYPICAL APPLICATIONS

MasterSeal 953 can be used in the following circumstances:

- Below ground building structures
- Tunnels
- Water exclusion and protection of structures


ADVANTAGES

- Flexibility to low temperatures
- High Puncture resistance
- Will not rot
- Excellent Weldability
- Long life expectancy

PACKAGING

MasterSeal 953 is supplied in a packing of 10 pc per box.

Thickness	2.3 mm
Dimension A	180 mm
Dimension B	30 mm
Height	22
Weight	0.120 kg/pc
Colour	Grey

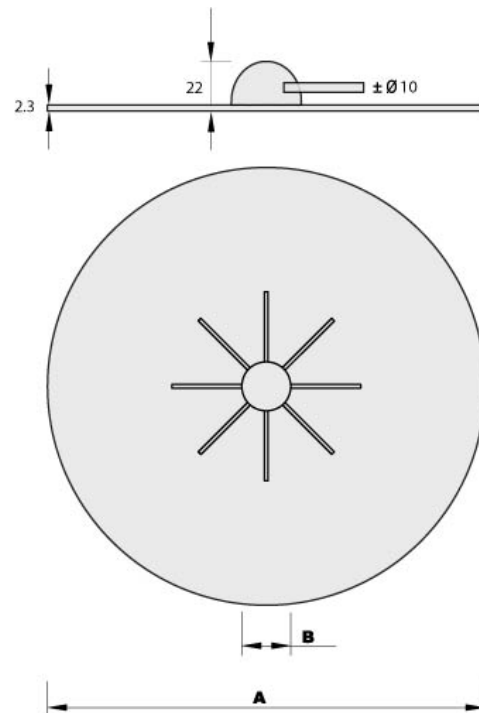

MasterSeal[®] 953

APPLICATION GUIDELINES

Usually done by a Specialist Applicator. Please contact Master Builders Solutions Construction Chemicals for specific application assistance.

STORAGE

Store out of direct sunlight, clear of the ground and on pallets.

QUALITY AND CARE

All products originating from Master Builders Solutions Dubai, UAE facility are manufactured under a management system independently certified to conform to the requirements of the quality, environmental and occupational Health & Safety standards ISO 9001 and ISO 14001.

* Properties listed are based on laboratory controlled tests.

® = Registered trademark of the MBCC Group in many countries.

MBS_CC-UAE/SI_953_04_07/v2/09_15

STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this Master Builders Solutions publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by Master Builders Solutions either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not Master Builders Solutions, are responsible for carrying out procedures appropriate to a specific application.

Master Builders Solutions
Construction Chemicals LLC
P.O. Box 37127, Dubai, UAE
Tel: +971 4 8090800
www.master-builders-solutions.com/en-ae

Disclaimer: the TUV mark relates to certified management system and not to the product mentioned on this datasheet



A brand of
MBCC GROUP