



# Ucrete® CS

# Heavy-Duty Flooring System with Color Stability in UV and Chemical Environments

Ucrete CS utilizes Ucrete DP basecoat systems and the new Ucrete TCCS, a three-component, encapsulation resin topcoat for enhanced aesthetics and stain resistance.

### **KEY FEATURES:**

- Color stability with non-yellowing finish for an attractive work environment
- Rapid curing, allowing early return to service
- Ability to withstand temperatures up to 248°F (120°C)
- Highly resistant to chemicals such as Acetic, Lactic and Nitric Acid and the staining effects of long-term exposure
- Non-tainting after five hours
- Slip-resistant profile for increased workplace safety
- Highly hygienic flooring
- Ability to withstand severe impact loads








Please do not hesitate to contact us for more information!


http://ucrete-cs.us

## **UCRETE CS SYSTEM**

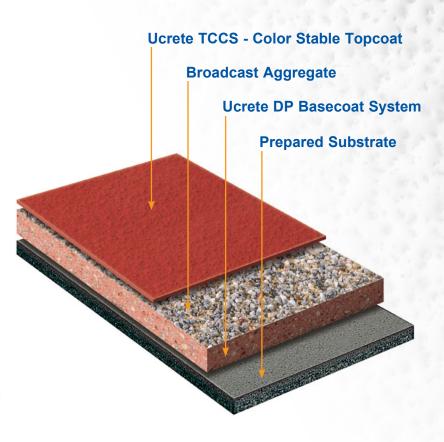


# **Key Benefit:** Reduced Chemical Staining

### Ucrete CS System

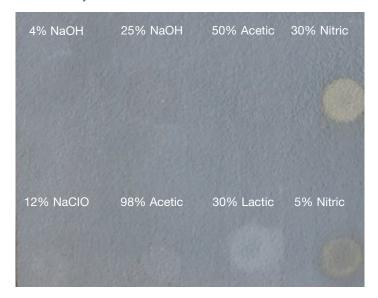

### Competitive System

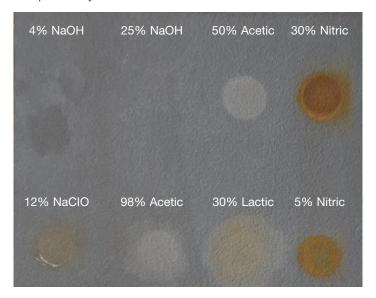

# **Recommended Applications:**

- Dairy Plants
- Food and Beverage Processing
- Pharmaceutical Facilities
- Areas requiring aesthetics
- Retail and Supermarkets
- Meat and Poultry Plants
- Facilities with severe conditions high impact pressure, thermal shock and chemical exposure
- Freezers and Coolers

# **Standard Colors:**







Red Light Grey

Master Builders Solutions Constructions Systems US, LLC 889 Valley Park Drive Shakopee, MN 55379 USA

Customer Service (800) 433-9517 Technical Service (800) 243-6739 master-builders-solutions.com/EN-US



Grey

® registered trademark of a Group member in many countries of the world
© 2021 MBCC Group, 14000641 rev 03/2021

LIMITED WARRANTY NOTICE: Master Builders Solutions Construction Systems US, LLC ("Master Builders") warrants this product to be free from manufacturing defects and to meet the technical properties on the current Technical Data Guide, if used as directed within shelf life. Satisfactory results depend not only on quality products but also upon many factors beyond our control. Master Builders MAKES NO OTHER WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ITS PRODUCTS. The sole and exclusive remedy of Purchaser for any claim concerning this product, including but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is shipment to purchaser of product equal to the amount of product that fails to meet this warranty or refund of the original purchase price of product that fails to meet this warranty, at the sole option of Master Builders. Any claims concerning this product must be received in writing within one (1) year from the date of shipment and any claims not presented within that period are waived by Purchaser. Master Builders WILL NOT BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDING LOST PROFITS) OR PUNITIVE DAMAGES OF ANY KIND.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on Master Builders's present knowledge and experience. However, Master Builders assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. Master Builders reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.