



MasterFlow® 4316

Next Generation Precision Machinery Grout


**The strength of an epoxy with the ease
of application of a cementitious grout**

New to BASF's MasterFlow grout offering, this advanced material technology builds on a century of respected experience in industrial grouting applications. Masterflow 4316 incorporates the latest binder packing models and applied nanotechnology to produce a grout with superior technical performance, unique rheological properties, extended open times and wide application and in service temperature windows.

High Early and Ultimate Strengths in a Wide Range of Application and Service Temperatures

Ultra High Strength Hybrid Hydraulic Grout offers Placement and In Service Advantages

MasterFlow 4316 is a unique grout that provides high early and ultimate compressive strengths over a wide variety of application and service temperatures. The superior performance of MasterFlow 4316 lies in its novel hydraulic cement binder with applied nanotechnology and premium mineral aggregates which, when mixed with water, produces a flowable and pumpable grout that can be installed in temperatures ranging from 35 to 100° F (2 to 38° C).

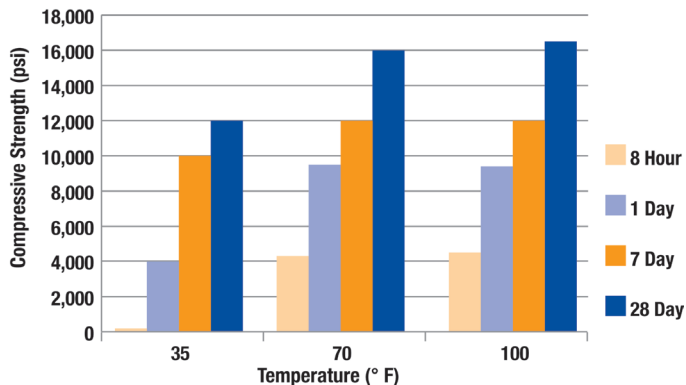

MasterFlow 4316 grout features:

- High early compressive strength
 - up to 4,300 psi at 8 hours
 - 8,000 psi at 1 day
 - 16,000 psi ultimate strength
- 95% Effective Bearing Area
- Extremely dense material with proven fatigue resistance – durable
- Outstanding shrinkage, impact and vibration resistance
- Ability to place in cold weather (35° F / 2° C)
- In service temperatures up to 1000° F (538° C)
- Homogeneous, flowable and pumpable
- Application advantage – one component, easy mixing, placement and cleanup

Hybrid hydraulic grout providing the valued benefits of STRENGTH and SPEED

- Keeps jobs on schedule
- Reduces shutdown times

Typical Applications:

- Grouting of equipment, such as compressors and generators, pump bases and drive motors, tank bases, conveyors, foundations, etc.
- In cold weather, when tenting and/or heating are impractical
- Where high early and later-age compressive strengths are required
- Where high service temperatures are present
- Where a non-shrink grout is required for optimum load transfer

Master Builders Solutions from BASF

The Master Builders Solutions brand brings all of BASF's expertise together to create chemical solutions for new construction, maintenance, repair and renovation of structures. Master Builders Solutions is built on the experience gained from more than a century in the construction industry.

The know-how and experience of a global community of BASF construction experts form the core of Master Builders Solutions. We combine the right elements from our portfolio to solve your specific construction challenges. We collaborate across areas

of expertise and regions and draw on the experience gained from countless construction projects worldwide. We leverage global BASF technologies, as well as our in-depth knowledge of local building needs, to develop innovations that help make you more successful and drive sustainable construction. The comprehensive portfolio under the Master Builders Solutions brand encompasses concrete admixtures, cement additives, chemical solutions for underground construction, waterproofing solutions, sealants, concrete repair and protection solutions, performance grouts, performance flooring solutions.

BASF Corporation
Construction Systems
 889 Valley Park Drive
 Shakopee, MN 55379 USA

Customer Service 1(800)433-9517
Technical Service 1(800)243-6739
master-builders-solutions.basf.us



FSC Placeholder

LIMITED WARRANTY NOTICE: BASF warrants this product to be free from manufacturing defects and to meet the technical properties on the current Technical Data Guide, if used as directed within shelf life. Satisfactory results depend not only on quality products but also upon many factors beyond our control. BASF MAKES NO OTHER WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ITS PRODUCTS. The sole and exclusive remedy of Purchaser for any claim concerning this product, including but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is shipment to purchaser of product equal to the amount of product that fails to meet this warranty or refund of the original purchase price of product that fails to meet this warranty, at the sole option of BASF. Any claims concerning this product must be received in writing within one (1) year from the date of shipment and any claims not presented within that period are waived by Purchaser. BASF WILL NOT BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDING LOST PROFITS) OR PUNITIVE DAMAGES OF ANY KIND.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on BASF's present knowledge and experience. However, BASF assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. BASF reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.