

MasterRoc MP 355

Highly reactive, two component polyurethane injection foam to stop high volume water ingress and for ground consolidation

MATERIAL DESCRIPTION

MasterRoc MP 355 is a two component, solvent free polyurethane injection resin specifically designed for rapid water stopping and ground consolidation.

FIELD OF APPLICATION

- Permanent stopping of high volume water ingress in underground structures.
- Also suitable for cold water.
- Ground consolidation.

FEATURES AND BENEFITS

- On contact with water, the product forms a rigid foam.
- Without the presence of water, the product also reacts and forms a hard substance. This is a significant safety advantage, as the material never remains uncured.
- On contact with water the reaction is completed within a short period of time.
- Provides structural strength and rigidity.

PACKAGING

MasterRoc MP 355 is supplied as:

Part A: 25 kg cans and 200 kg drums
 Part B: 30 kg cans and 240 kg drums


TECHNICAL DATA

| | Color | Viscosity MPa's | Density Kg/dm ³ |
|----------------|------------|--------------------|-------------------------------|
| Part A | Yellowish | 320 | 1.00 |
| Part B | Dark brown | 240 | 1.23 |
| Accelerator 10 | Yellowish | 500 | 1.00 |
| Accelerator 15 | Yellowish | 1000 | 1.00 |
| Accelerator 25 | Yellowish | 20 | 0.90 |

Tested at 20°C

APPLICATION PROCEDURE

Part A and B are delivered ready to use. They are injected in the proportion of 1:1 by volume using a two-component injection pump equipped with a static in-line mixer nozzle, as shown below.

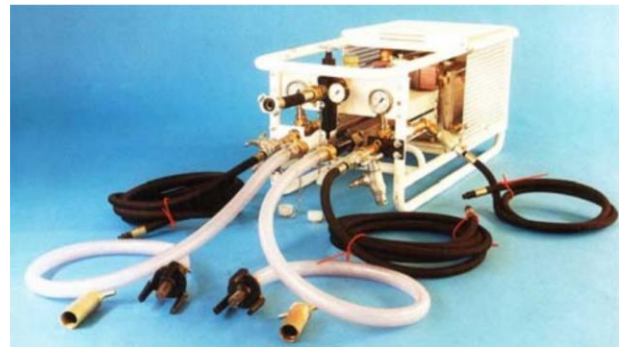

Please note: The foaming reaction time is dependent on the temperature of the product, and the ground water.

MasterRoc MP 355's properties can be altered by the use of three different accelerators:

- MasterRoc MP 355 Accelerator 10
- MasterRoc MP 355 Accelerator 15
- MasterRoc MP 355 Accelerator 25

For a high foaming factor (approximately 20-25) and a rapid reaction for water stopping: Add the Accelerator 10 to Part A by 0.5 - 1% dosage (by weight of Part A).

For a dense foam (factor 7-9) with high mechanical strength for ground consolidation: Add the Accelerator 15 to Part A by 0.5 - 1% dosage (by weight of Part A).

Accelerator 25 combines the functions of Accelerator 10 and Accelerator 15. If a big amount of water is expected in soil or rock and a strong foam with a low expansion factor is needed, Accelerator 25 should be added to Part A by 0.1 - 0.5% dosage (by weight of Part A). If a particularly rapid reaction is required, one can additionally premix water to Part A, 2% by volume of Part A.

MasterRoc MP 355

Highly reactive, two component polyurethane injection foam to stop high volume water ingress and for ground consolidation

After the addition of accelerator (and water if added) to Part A, the can should be shaken vigorously to ensure even dispersion throughout the resin prior to injection works.

To achieve the best mixing of the components during injection, the inclusion of a static in-line mixer in connection with the mixing head is strongly advised. The length of the static mixer should be approximately 32 cm.

Note: **MasterRoc MP 355** is not suitable for large volume void filling.

CLEANING OF INJECTION EQUIPMENT

For short breaks in the injection procedure, pump Part A through the in-line static mixer nozzle. After finishing the injection, pump an appropriate agent or oil which does not contain water through the pump and injection lines.

STORAGE

If stored in dry conditions in unopened, tightly closed original containers and within a temperature range of +5°C and +35°C, the components of **MasterRoc MP 355** have a shelf life of 12 months.

SAFETY PRECAUTIONS

Avoid contact with skin and eyes by using the required personal protective equipment, such as overalls, gloves and safety glasses. If contact with skin occurs, wash thoroughly using soap and water. If contact with eyes occurs, rinse thoroughly with an eyebath filled with boracic solution and seek medical advice. Refer to the Material

Safety Data Sheet for safety measures. The products are harmless.

Uncured products should be prevented from entering local drainage systems and water courses. Spillage must be collected using absorbent materials such as sawdust and sand and disposed of in accordance with local regulations.

NOTE

Technical support, where provided, does not constitute supervisory responsibility. For additional information contact your local MB Construction Chemicals Solutions South Africa (Pty) Ltd representative. MB Construction Chemicals Solutions South Africa (Pty) Ltd shall not be liable for technical advice provided.

MB Construction Chemicals Solutions South Africa (Pty) Ltd reserves the right to have the true cause of any difficulty determined by accepted test methods. Undertaking such tests is not, and shall not be deemed to be, an admission of liability or an assumption of any risk, loss, damage or liability.

QUALITY AND RESPONSIBLE CARE

All products originating from MB Construction Chemicals Solutions South Africa (Pty) Ltd are manufactured under a management system independently certified to conform to the requirements of the quality standards ISO 9001, environmental and occupational health and safety standards.

* Properties listed are based on laboratory controlled tests

DISCLAIMER

The technical information and application advice given in this MB Construction Chemicals Solutions South Africa (Pty) Ltd publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.