

MasterFlow[®] 9200

Ultra high strength, cement based grout with applied nanotechnology for grouting onshore VESTAS wind turbine installations

PRODUCT DESCRIPTION

MasterFlow 9200 is a shrinkage compensated, cement based grout which when mixed with water, produces a homogeneous, flowable and pumpable grout with exceptionally high early and final strength and modulus.


The product exhibits increased ductility, fatigue and impact resistance. Latest best binder packing models and applied nanotechnology produces a grout with superior technical performance, exceptional rheological properties, and uniquely, extended open times.

FIELDS OF APPLICATION

MasterFlow 9200 has been especially formulated for:

- Grouting of wind turbine installations, that are installed using pre-stressing techniques e.g. base plate grouting of onshore wind turbines
- Installations where excellent fatigue resistance is required.
- Grouting under very harsh conditions, e.g. temperatures as low as 2°C.
- Anchoring anchor bolts of wind turbine towers
- All void filling from 25mm to 300mm (under tower flange) where high strength, high modulus, high ductility is important.

Contact the Technical Department of your local Master Builders Solutions office regarding any application or dimensions required not mentioned here.

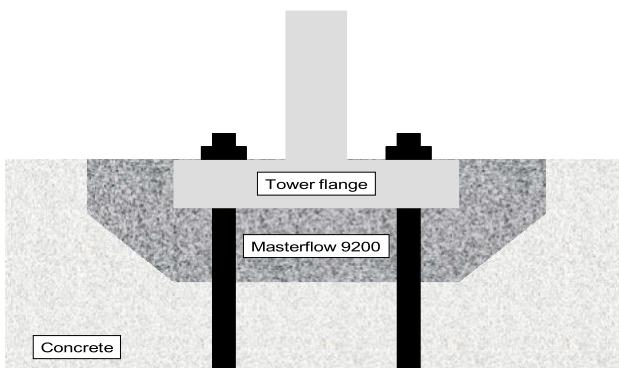

FEATURES AND BENEFITS

- Validated according the German DAfStb guideline (RIL): "Production and application of cement based flowing concrete and grouting mortar" (VeBMR).
- Ultra high compressive strength: > C100/115.
- The actual strength class is not covered by EN206, but is in the order of C110/125 or

- higher
- Ultra high modulus for exceptional stiffening properties.
- Excellent fatigue resistance.
- Quick return to service and removal of temporary supports due to high early strength build-up.
≥ 55 MPa @ 24hrs at 20°C
- No segregation or bleeding to ensure consistent final physical performance and to prevent pump blockages.
- Extended pot life of ≥ 2 hours
- Can be pumped into complex areas or areas inaccessible to conventional grouting methods
- Specially graded sands and exceptional flow and low friction increases pump output, reduces installation times and costs as well as reducing pump pressures and wear
- Dust reduced for ease of handling
- Cement based.
- Low chromate.

APPLICATION METHOD

MasterFlow 9200 has been especially formulated for use in specific applications. As such MasterFlow 9200 should be installed by experienced fully trained, contractors.

Full application procedures are available on request.

Mixing:

Do not add cement, sand or other materials that affect the properties of this quality-controlled product. Mix full bags only.

Use one or more mixers (forced action pan mixers are advised) to permit mixing and placing operations to proceed simultaneously without interruption.

Mix with potable water only. Put most of the water required in the mixer and add slowly the grout material. Mix until a homogeneous mortar (3 to 4 minutes), add the remaining water and continue mixing for at least another 2 minutes until the required fluid or flowable consistency is obtained.

Preparation of the concrete substrate:

Remove all formwork, formwork release agents and other materials that can prevent good adhesion of Masterflow 9200 to the concrete foundation.

Thoroughly clean out the foundation area to be grouted back to a clean and structurally sound concrete.

MasterFlow® 9200

Ultra high strength, cement based grout with applied nanotechnology for grouting onshore VESTAS wind turbine installations

Saturate the cleaned foundation with plenty of water. Remove all free standing water just prior to grouting.

Placement of grout:

Mix and place the grout as close as possible to the area to be grouted. Have sufficient manpower, materials and tools to make mixing and placing rapid and continuous.

MasterFlow 9200 should be pumped into the area to be grouted.

The grout shall be placed continuously and from one side only, to avoid air entrapment while grouting. Make sure grout fills the entire space to be filled and remains in contact with the base plate and foundation throughout the entire grouting process.

DO NOT VIBRATE MasterFlow 9200

CLEANING OF TOOLS

Tools and spillages can be cleaned with water while MasterFlow 9200 is still uncured.

Once hardened, the material can only be removed mechanically.

CONSUMPTION

ca. 2.2 kg powder for 1 litre of mixed mortar

PACKAGING

MasterFlow 9200 is supplied in 25 kg bags or 500 kg big bags.

STORAGE

Store in cool and dry conditions. Shelf life under these conditions is 12 months in unopened original bags.

NOTES

- Sands or other products that could affect the products properties must not be added.
- MasterFlow 9200 which will be exposed to strong drying conditions, e.g. mortar which is directly exposed to heavy wind and/or direct sunlight, should be protected with moist cloth or plastic foil, or by using appropriate MasterKure curing agents.
- The temperature of the grout material, mixing water and elements coming in contact with the mixed grout should be in the range of +2°C to +30°C
- When grouting in environments below +2°C or above

+30°C contact the Technical Department of your local Master Builders Solutions Construction Chemicals office.

HEALTH AND SAFETY

Usual preventive measures for the handling of chemical products should be observed when using this product, for example do not eat or drink while working and wash hands when taking a break or when the job is completed.

MasterFlow 9200 contains cement. Avoid contact with eyes and prolonged contact with skin. In case of contact with eyes, immediately flush with plenty of water for at least 15 minutes. Call a physician. In case of contact with skin, wash skin thoroughly.

Specific safety information referring to the handling and transport of this product can be found in the Material Safety Data Sheet.

Disposal of product should be carried out according to the local legislation in force. Responsibility for this lies with the final owner of the product.

Hazards Identification



Possible hazards:
Irritating to respiratory system
and skin. Risk of serious
damage to eyes

Hazard Statement:

H318 Causes serious eye
damage H315 Causes Skin
irritation
H335 May cause respiratory irritation

Precautionary Statements:

P102 Keep out of reach of children
P280 Wear protective gloves and eye/face
protection P261 Avoid breathing dust
P264 Wash with plenty of water and soap thoroughly after handling
P305/P351/P338 If in eyes: rinse cautiously with water for several
minutes.

Remove contact lenses, if present and
easy to do. Continue rinsing.

P315 Get immediate medical advise/attention.
P304/P340 If inhaled: remove victim to fresh air and keep at rest
in a position comfortable for breathing

P302/P352 If on skin: wash with plenty of soap and water
P332/P313 If skin irritation occurs: get medical
advice/attention P362 Take off contaminated clothing and
wash before reuse

MAL-kode (1993): 00-4

MasterFlow® 9200

Ultra high strength, cement based grout with applied nanotechnology for grouting onshore VESTAS wind turbine installations


TECHNICAL DATA		Unit	Values		
Density of mixture (DIN18555-2)	g/cm³	Approx. 2.4			
Mixing water demand	litres	Approx. 1.875 / 25 kg powder (0.75 / kg)			
Pot life of mixed material	hours	≥ 2			
Setting time	hours	≤ 8			
Air content (EN 1015-7)	%	≤ 4			
Application temperature (substrate and material):	°C	From +2 to +30			
Application thickness	mm	25 - 300			
Mechanical properties:					
Compressive strength (40 x 40 x 160 mm prisms – EN 12190)	N/mm²	<u>20°C</u>	<u>30°C</u>	<u>2°C</u>	
- after 1 day		≥ 55	≥ 70	≥ 3	
- after 7 days		≥ 80	≥ 90	≥ 60	
- after 28 days		≥ 110	≥ 120	≥ 90	
Flexural strength (40 x 40 x 160 mm prisms – EN196-1)	N/mm²	≥ 14			
Tensile splitting strength (EN12390-6)	N/mm²	≥ 8			
Static modulus of elasticity (EN 13412)	GPa	≥ 40			
Capillary water absorption (EN 13057)	kg / m².h ^{-0.5}	≤ 0.05			
Drying shrinkage (EN 12617-4)	mm/m	≤ 0.3			
Crack resistance - Coutinho-ring		no cracking after 180 days			
Adhesion strength to concrete (EN 1542)	N/mm²	≥ 2			
Adhesion strength after freeze/thaw (EN 13687-1)	N/mm²	≥ 2			
Pull-out strength of rebar (EN 1881) displacement at 75kN load	mm	≤ 0.6			
Installation / Additional information					
Maximum grain size	mm	3			
Mixing time	minutes	Approximately 7			
Mixer type		e.g. pan mixer			
Application method		One continuous pour, from one side only			
Fire resistance (EN13501-1)	class	A1 (fl)			
Classification acc. DAFStb VeBMR Rili					
Flow channel classification		f1 (after 2 min)			
Correlation consistency:					
- Flowing channel after 2 min.	cm	61			
- Flow after 2 min.:	cm	22			
Compression strength classification		> C100/115			
Early compression strength classification		A			
Shrinkage classification		SKVM 0			
Exposure classes (EN 206-1, DIN 1045-2)		XO, XC4, XD3, XS3, XF3, XA2, WF			
Data are given for conditions of 20°C and 65% R.H. unless otherwise stated. The technical data provided do not represent guaranteed minima.					

MasterFlow[®] 9200

Ultra high strength, cement based grout with applied nanotechnology for grouting onshore
 VESTAS wind turbine installations



CE	
1073-CPR-269-01	
BASF A/S	Hallandsvej 1
	DK-6230 Rødekor
13	DK0019/01
EN 1504-6	Anchoring product
Pull-out strength	Displacement $\leq 0,6\text{mm}$ at load of 75 kN
Chloride ion content	$\leq 0,05\%$
Reaction to fire	Euroclass A1
Dangerous substances	Comply with 5.3 (EN 1504-6)

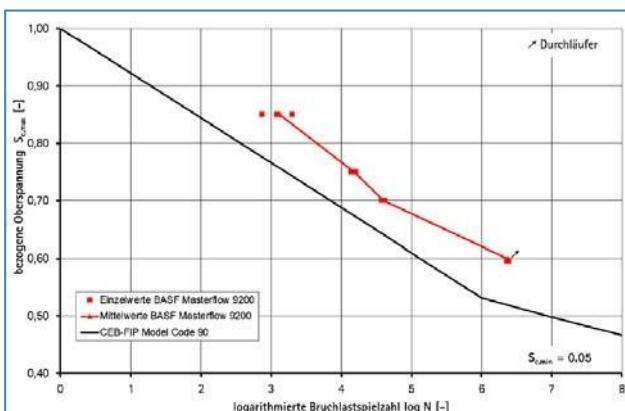

Fatigue resistance measured according CEB-FIB Model Code 90

MasterFlow[®] 9200

**Ultra high strength, cement based grout with applied nanotechnology for grouting onshore
VESTAS wind turbine installations**

NOTA:

La presente ficha técnica sirve, al igual que todas las demás recomendaciones e información técnica, únicamente para la descripción de las características del producto, forma de empleo y sus aplicaciones.

Los datos e informaciones reproducidos se basan en nuestros conocimientos técnicos obtenidos en la bibliografía, en ensayos de laboratorio y en la práctica.

Los datos sobre consumo y dosificación que figuran en esta ficha técnica, se basan en nuestra propia experiencia, por lo que estos son susceptibles de variaciones debido a las diferentes condiciones de las obras. Los consumos y dosificaciones reales, deberán determinarse en la obra, mediante ensayos previos y son responsabilidad del cliente.

Para un asesoramiento adicional, nuestro Servicio Técnico, está a su disposición.

Master Builders Solutions se reserva el derecho de modificar la composición de los productos, siempre y cuando éstos continúen cumpliendo las características descritas en la ficha técnica.

Otras aplicaciones del producto que no se ajusten a las indicadas, no serán de nuestra responsabilidad.

Otorgamos garantía en caso de defectos en la calidad de fabricación de nuestros productos, quedando excluidas las reclamaciones adicionales, siendo de nuestra responsabilidad tan solo la de reintegrar el valor de la mercancía suministrada. Debe tenerse en cuenta las eventuales reservas correspondientes a patentes o derechos de terceros.

Edición: 08/04/2021

La presente ficha técnica pierde su validez con la aparición de una nueva edición.

Master Builders Solutions Brasil Ind. e Com. de Químicos para Construção Ltda.
Avenida das Nações Unidas,
14.171, Morumbi
Sao Paulo – SP, Brasil
Tel: +55 11 2718 5507
<https://www.master-builders-solutions.com/pt-br>

Master Builders Solutions Colombia S.A.S
Tel: +57 1 632 20 90
<https://www.master-builders-solutions.com/es-co>

Master Builders Solutions Chile Ltda.
Rio Palena 9665, Pudahuel
Núcleo Empresarial ENEA
Santiago de Chile, Chile
Tel: +56 2 2799 4300
<https://www.master-builders-solutions.com/es-cl>

Master Builders Solutions Perú S.A.
Jr. Plácido Jiménez N° 630
Lima, Perú
Tel: +51 1 219 0630
<https://www.master-builders-solutions.com/es-pe>

Para obtener más información, visítenos en www.master-builders-solutions.com/