




# Balkonsysteem 1

Economisch balkonvloersysteem op basis van polyurethaan met antislipbekleding.

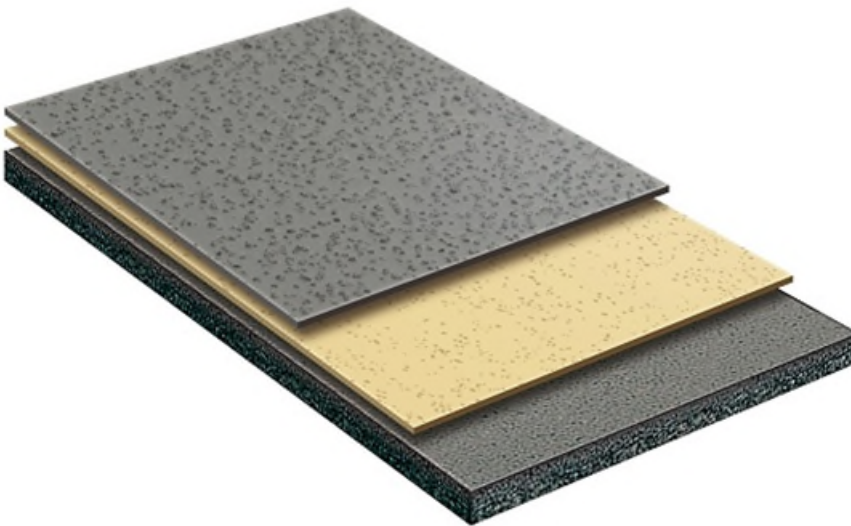

Verbruik


	<b>Primer / Body Coat</b>	Zie primertabel	
	<b>Top Coat</b>	<b>MasterSeal TC 258</b>	± 400 g/m <sup>2</sup>
	Instrooien/Inblazen	open en gelijkmatig instrooien of inblazen met <b>MasterTop F5</b> (Filler) en direct doorrollen van de <b>MasterSeal TC 258</b>	± 400 g/m <sup>2</sup>

Het verbruik is indicatief en kan hoger zijn, afhankelijk van de toestand van de ondergrond.  
 Keuze primer afhankelijk van de ondergrond.

# Balkonsysteem 1

Economisch balkonvloersysteem op basis van polyurethaan met antislipbekleding.

## CE MARKERING Balkonsysteem 1

	
Master Builders Solutions Belgium nv Nijverheidsweg 89, B-3945 Ham	
12	
EN 1504-2	
Balcony system	
Linear shrinkage	NPD
Compressive strength	NPD
Coefficient of thermal expansion	NPD
Abrasion resistance	NPD
Grid cut	NPD
Permeability to CO <sub>2</sub>	NPD
Permeability to water vapour	S <sub>d</sub> 3,3 m Class I
Capillary absorption and permeability to water	< 0,1 kg/m <sup>2</sup> .h <sup>0,5</sup>
Resistance to thermal shock	NPD
Adhesion after thermal compatibility For outside application 10x Thunder Shower + 50x Freeze salt cycling with de-icing salt immersion	1,3 MPa
Chemical resistance	NPD
Resistance to severe chemical attack	NPD
Adhesion on wet concrete	NPD
Adhesion after storage at T <sub>Norm</sub> coating at T <sub>Norm</sub>	4,1 MPa 4,1 MPa
Crack bridging ability	NPD
Reaction to fire classification	B <sub>2</sub> – S1
Slip / skid resistance Wet tested Dry tested	50 = Class I 93 = Class II
Behaviour after artificial weathering	Blistering: none Cracking: none Flaking: none Colour change: none Loss of gloss: yes

NPD = No Performance Determined